


Sensor Head SKL UV

The Sensor Head SKL UV is used to connect the BFI Fiber Optic Cable to the sight port of the application.

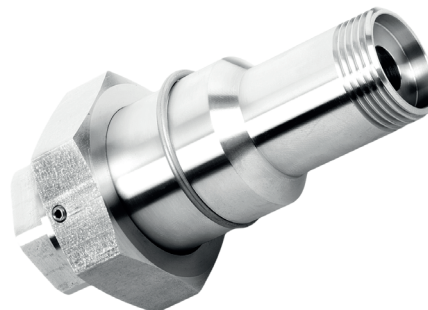

1 | Technical data

Spectral sensitivity	190 nm to 2200 nm
Angel of view	2.7°
Material	stainless steel 1.4301
Orientation	axial
Ambient temperature	-60 °C to +400 °C
Dimensions	65 mm x 115 mm
Sight port connection	G 1" female thread
FOC connector	M30
Weight	approx. 0.75 kg

2 | Dimensions

